


HSPA 3.5G USB Modem

ZTE MF636

Quick User Guide



ZTE中兴

These instructions appear under the HELP tab in the modem's connection manager and under the icon on the status bar.

For support, please call Cellcom's customer service at *320 or 052-9986935.

Introduction

Congratulations on your purchase of Cellcom's new USB modem, ZTE MF636 HSPA. This is a multi-mode 3.5G modem, working in HSUPA/HSDPA/UMTS/EDGE/GPRS/GSM networks. With the USB interface connecting to a laptop or a desktop PC, the modem offers you convenient mobile communications combined with full Internet access.

Key Specifications


The following table shows the specification of your device.

Interface Type	USB
Systems supported	Supports most types of laptop and desktop PCs
Operating systems supported	Windows XP SP2/SP3, Vista x86/x64, Windows 7 MAC OS X
Functions	SMS service, Data service, Applications management, Data concurrent, etc.
Technologies supported	HSUPA/HSDPA/UMTS/EDGE/GPRS/GSM
Transmission speed (Max)	HSPA Downlink 2.0Mbps, Uplink 7.2Mbps
	UMTS Downlink 384Kbps, Uplink 384Kbps
	EDGE Downlink 236.8Kbps, Uplink 118.4Kbps
Micro SDHC (T-Flash)	Supports up to 4GB MicroSD card

Weight	About 40g
Dimensions	69 mm×26.5 mm×12 mm
Operating Temperature	0~55°C
Humidity	5%-95%

Getting to Know Your Device

The following figure shows the appearance of the MF636. It is only for your reference, the actual product may be different.

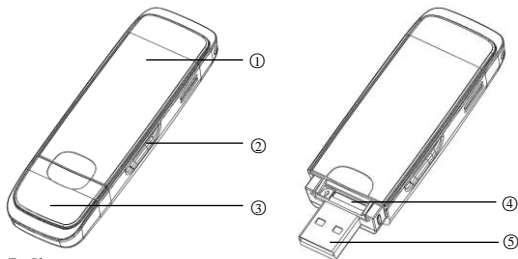

① Indicator

It indicates your modem status.

② Memory card slot (MicroSD card)

It is where you insert memory card (MicroSD card).

③ Modem cap

It protects your modem USB port when it is not used.

④ USIM card slot

It is where you insert the UMTS subscriber identity module (USIM) card.

⑤ USB connector

Connect your modem to the laptop or desktop computer.

Setting Up and Connecting Your Modem

1) Insert the USIM card into the USB modem:

To install USIM card

- First take out the modem cap, then the USB connector is visible.
- Pull out the plastic drawer above the USB connector.

Note: Do not pull the drawer rudely because it is fixed to the modem. If not handled carefully the drawer will get damaged.

- Insert the USIM card into the drawer, with the metal contact area facing downwards.



- Insert the plastic drawer back into the modem. You can hear a click when the USIM card locks in place.

To remove the USIM card from the USB modem


- First take out the modem cap.
- Pull the plastic drawer gently till you hear a click when USIM card is unlocked.
- Take out the USIM card.

2) Install the MicroSD card into the USB modem, see following drawing:



3) Connect the USB modem to your PC:

- Plug the USB modem into your computer's USB port and make sure that it is tightly inserted.
- The OS automatically detects and recognizes new hardware and starts the installation wizard.

When the installation is completed, on the desktop and on the status bar the ZTE Connection Manager icon  will appear.

- For connecting to the network, press Connect.

Note: If the system does not launch installation automatically, you can run the installation program in path of **My Computer > ZTEMODEM > AutoRun.exe**.

Note: Next time you insert the modem to your PC, it will be automatically recognized and the Connection Manager window will appear immediately.

Removing Your Modem Safely

Disconnect the Connection Manager, close the software, and then you can pull out the USB modem safely. It is recommended to use Safe Remove.

Know Your Modem Status by the Color Indicators






The table below explains the color indicators for the modem's status:

Color Indicator	Modem Status
Orange	Not detecting any network
Red always on	Roaming status

Red blinking	Active connection when roaming
Green always on	Attached to 2G network
Green blinking	Active connection via 2G network
Blue always on	Attached to 3G network
Blue blinking	Active connection 3G network

How to Operate Your Modem

Various icons are presented to enable quick operation of the following functions:

	Internet	The modem is pre-configured to Cellcom network. Click “ Connect ” button to connect to the Internet.
	SMS	Click “ New Message ” button, enter recipient’s number and content, and then click “ Send ” to send new SMS.
	Phone Book	Click “ New ”→ “ New Contact ” to add a new contact.
	Settings	Setting the configuration for the USB modem.
	Help	Shows help information, for example: User manual, assistance with problems, etc.

Safety Warning

To the Owner

- Using electronic transmitting devices in aircraft, at petrol stations, and in hospitals is prohibited. Please observe and obey all warning signs and switch off your modem in these conditions.
- Operating USB modem may interfere with medical devices like hearing aides and pacemakers.
- Be aware of warning signs in places such as oil refineries or chemical factories where there are explosive gases or explosive products being processed.
- Store the USB modem out of the reach of children. The USB modem may cause injury if used as a toy or may be damaged by rough play or moisture.

Using your USB Modem

- Only use original accessories supplied by the manufacturer. Using unapproved accessories may invalidate your warranty.
- Avoid using the USB modem near or inside metallic structures or establishments that can emit electromagnetic waves.
- Do not use the modem while driving.
- The USB Modem is not waterproof. Please keep it dry and store it in a cool place out of direct sunlight.
- Handle the USB modem with care. Don not drop, bend, knock or treat it harshly to avoid damage to the unit.
- There are no user serviceable parts. Do not paint or clean it with chemical agents.
- Dismantling the unit will invalidate the warranty.
- Operating the modem within the limits of temperature range 0°C ~ +55°C and humidity 5%~95% is recommended.